


# AIRWIN<sup>®</sup>

## P N E U M A T I C

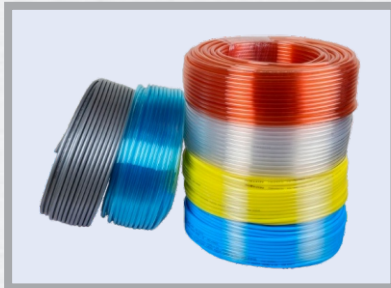

Your Trusted  
**Solution** Partner In  
Pneumatic Products...

[www.airwinpneumatics.in](http://www.airwinpneumatics.in)



## AP SERIES AIR SOURCE TREATMENT UNIT

28



Filter Regulator Lubricator



Filter Regulator



Regulator

### Specifications

| Model                        | APFRL2010-02  | APFRL4010-04  |
|------------------------------|---------------|---------------|
| Flow Rate (L/Min.)           | 500           | 3000          |
| Port Size                    | G1/4"         | G1/2"         |
| Filter Efficiency            | 25μ           | 25μ           |
| Working Pressure             | 1.0 MPa       | 1.0 MPa       |
| Operating Temperature Range  | -5 To + 60°C  | -5 To + 60°C  |
| Range of Adjustable Pressure | 0.05-0.85MPa  | 0.05-0.85MPa  |
| Recommended Oil Use          | ISO VG 32     | ISO VG 32     |
| Container Material           | Polycarbonate | Polycarbonate |
| Protective Cover             | Available     | Available     |

| Model                        | APFR2000-02   | APFR4000-04   |
|------------------------------|---------------|---------------|
| Flow Rate (L/Min.)           | 550           | 4000          |
| Port Size                    | G1/4"         | G1/2"         |
| Filter Efficiency            | 25μ           | 25μ           |
| Working Pressure             | 1.0 MPa       | 1.0 MPa       |
| Operating Temperature Range  | -5 To + 60°C  | -5 To + 60°C  |
| Range of Adjustable Pressure | 0.05-0.85MPa  | 0.05-0.85MPa  |
| Container Material           | Polycarbonate | Polycarbonate |
| Protective Cover             | Available     | Available     |

| Model                        | APR2000-02   | APR4000-04   |
|------------------------------|--------------|--------------|
| Flow Rate (L/Min.)           | 550          | 6000         |
| Port Size                    | G1/4"        | G1/2"        |
| Working Pressure             | 1.0 MPa      | 1.0 MPa      |
| Operating Temperature Range  | -5 To + 60°C | -5 To + 60°C |
| Range of Adjustable Pressure | 0.05-0.85MPa | 0.05-0.85MPa |
|                              |              |              |
|                              |              |              |
|                              |              |              |

## Mini Ball Valve



### Specifications

|        |                       |
|--------|-----------------------|
| Size   | 1/2" & 1/4"           |
| Port   | Female / Male-Female  |
| Body   | Brass (Nickel Plated) |
| Ball   | Brass                 |
| Seat   | PTFE                  |
| O-ring | NBR                   |
| Stem   | Brass                 |
| Handle | Aluminium alloy       |
| Screw  | Stainless steel       |

## AIRWIN PNEUMATICS LLP

Plot No. G-613/6, Janani Industrial Zone,  
Kishan Gate Road, Lodhika G.I.D.C., METODA,  
Dist. Rajkot-360 021 (GUJARAT)

Mo. +91 99799 00957, +91 99799 00956

Email : [airwinpneumatics@outlook.com](mailto:airwinpneumatics@outlook.com) - Web : [www.airwinpneumatics.in](http://www.airwinpneumatics.in)

Auth. Distributor